

Standard packaging range for Lithium Battery

Nefab offers a complete range of UN-compliant packaging, compatible with different handling equipment, user-friendly, and covering all Li-battery statuses.

Our standard range is designed to match various supply-chain requirements from expendable to full returnable needs.

Returnable - End-Of-Life and Spare part flow



Half euro pallet Lithium-Ion Battery Box - Small



Durable hybrid Lithium-Ion Battery Box - Medium




Returnable End-of-Life Lithium-Ion Batteries packaging - Large

On Stock in specific locations

| | 2418R | 1812R | 1210R | 1208RP | 0806R |
|---|---------------|---------------|---------------|--------------|-------------------|
| External Dimension (mm) | 2400x1800x688 | 1800x1200x688 | 1200x1000x717 | 1215x815x487 | 795x595x269 |
| Internal dimension (mm) | 2366x1766x518 | 1766*1166*518 | 1165x965x531 | 1164x764x275 | 770x570x250 |
| Free area (eyelet; blocks) | 2178x1640x485 | 1578x1040x485 | 1072x874x531 | 1164x764x275 | 720x520x242 |
| Tare weight (kg) | 232 | 145 | 70 | 30 | 15 |
| Packing group: Max gross weight (kg) | l: 1 928 | I: 960 | I: 503 | I: 430 | I: 217 II: 217 |
| Stacking Static (kg) | 10 420 | 6 912 | 9 960 | 2 362 | 2 205 |
| Stacking Dynamic(kg) | 5 788 | 3 840 | 5 533 | 1 312 | 1 225 |

Compliant with ADR, IMDG, RID, UN Recommendations, CFR49 and ICAO/IATA Compliant for transport of EoL (P903, P909, LP903)

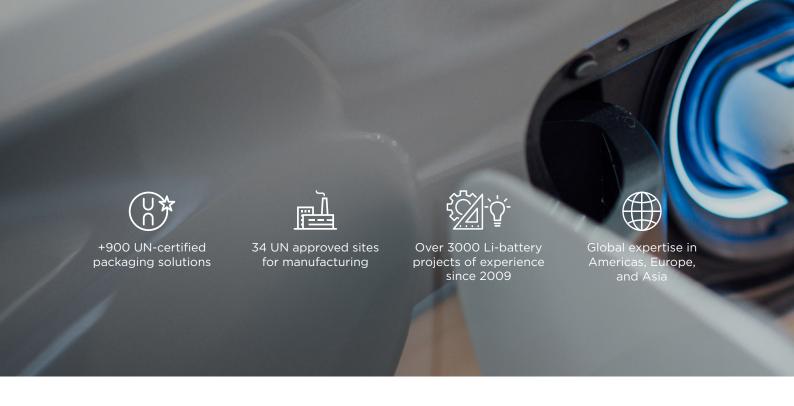

Expendable - End-Of-Life and Spare part flow





On Stock



Expendable LiB box Extra Large

| | 2418E | 1812E | 1210EC |
|---|-------------------|---------------------|-------------------|
| External dimensions (mm) | 2380 x 1780 x 628 | 1 770 x 1 170 x 628 | 1220 x 1020 x 715 |
| Internal dimensions (mm) | 2360 x 1760 x 450 | 1750 x 1150 x 450 | 1144 x 972 x 550 |
| Free area (eyelet; blocks) | 2254 x 1634 x 428 | 1645 x 1035 x 428 | 1140 x 960 x 500 |
| Tare weight (kg) | 135 | 75 | 35 |
| Packing group: Max gross weight (kg) | l: 1272 | I: 616 | II: 536 |
| Stacking Static (kg) | 6 900 | 4 835 | 963 |
| Stacking Dynamic (kg) | 3 833 | 2 686 | 536 |

Compliant with ADR, IMDG, RID, UN Recommendations, CFR49 and ICAO/IATA

Compliant for transport of EoL (P903, P909, LP903)

With addition of LiB Blanket and leak proof inner packaging also compliant for Defective Not Critical (P908, LP904) and Prototypes (P910, LP905)

