


BUNCKER® Pro Line HEAVY - RRP VERSION

“SUSTAINABLE, UN-CERTIFIED AND USER FRIENDLY SAFE PACKAGING FOR ALL LITHIUM BATTERIES”

BUNCKER® USER CONVENIENCE

- Easyness: bel jar design and one man handling
- Fixation of batteries with straps on the pallet foot
- Less spacing storage and transport: all parts are stackable
- Use: forklift all sides and lifting ring
- Clean: no need for filling material or inner packaging

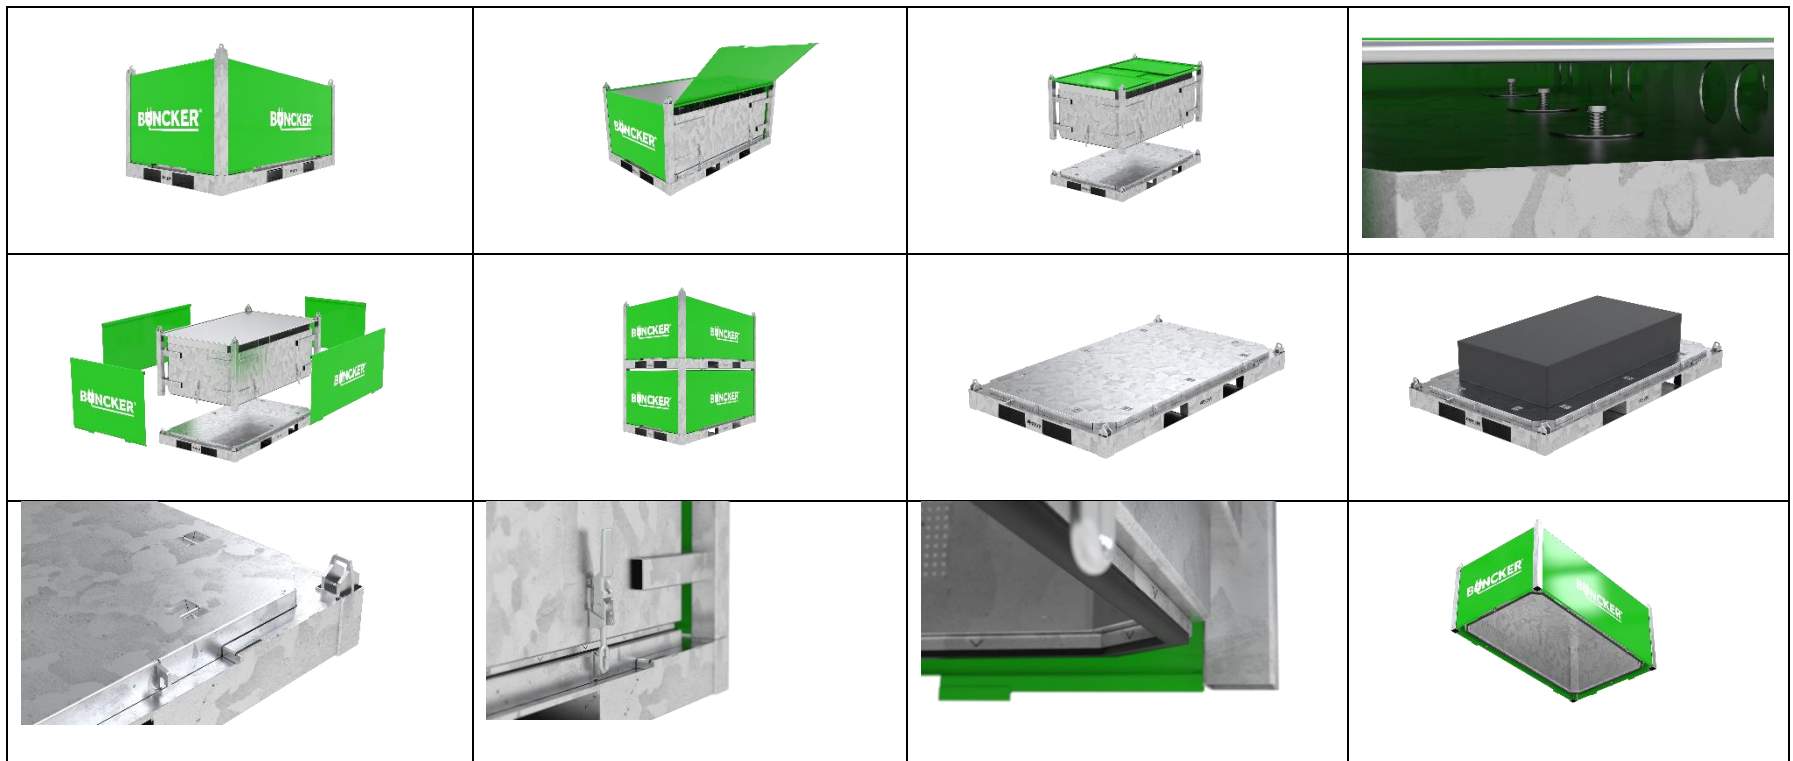

BUNCKER® APPLICATION: UN-APPROVED AND CERTIFIED

Transport and storage for all types and status of lithium batteries: instabil suspicious including for recycling purposes), damaged, defect, prototype, refurbished, remanufactured and new lithium batteries

- UN-approved according to P911/LP906
- Heat insulated walls with non-combustible Altilium CP blanket and ventilation: controlling a thermal runaway
- Overpressure, pressure relief valve and circulation holes
- Outside of packaging remains lower than 100 degrees Celsius
- Filtering of dangerous HF gasses

BUNCKER® RECYCLE PROGRAM

- All parts fully recyclable
- Sustainable footprint
- Long life cycle and robust

PACKAGING INSTRUCTION

- The status of the lithium battery defines its classification. Due to worst case scenario testing according to P911/LP906, this pallet shipper can be used for lithium batteries in all stages and for multiple lithium battery shipments
 - o In case of damaged batteries (stable & instable) according to P908/LP904 & P911/LP911
 - o In case of "prototype" batteries according to P910/LP905
 - o In case of recycling (end of life) batteries according to P909
- When packing according to P908/LP904, P910/LP905 & P909 an inner packaging should be used per single battery
- When packing according to P911/LP906 no inner packaging are required
- Depending on the size of our UN approved packaging make sure you never exceed the tested maximum weight in kgs or the maximum electrical energy in kWh



BUNCKER® Pro Line Heavy Assortment

Buncker® Pro Line Heavy assortment	S	M	L	XL	XXL
Outer dimensions (mm)	1200 x 1000 x 1150	1500 x 1200 x 1250	2000 x 1200 x 950	2400 x 1200 x 950	2800 x 2000 x 950
Product space dimensions (mm)	920 x 720 x 750	1220 x 920 x 850	1720 x 920 x 550	2120 x 920 x 550	2520 x 1720 x 550
Empty weight per pallet box in kgs	365	508	536	621	1120
Number of closures	6	6	6	8	10
Max. capacity nett weight of batteries in kgs	435	700	700	800	1540
Max. capacity of lithium batteries in kWh	50	90	90	100	200

Product delivery is inclusive straps & non-conductive mat

AVAILABLE ADDITIONAL ACCESSORIES ARE ON REQUEST (prices to be determined)

- Non-conductive PE-bags as inner packaging
- Magnetic class 9A dangerous goods label
- Magnetic document holder (A4 format)

AVAILABLE ADDITIONAL SERVICES (prices to be determined)

- Temperature sensors
- Shock sensors
- Logistic/GPS sensors

GENERAL TERMS AND CONDITIONS & SERVICE AND MAINTENANCE

Our general terms and conditions are applicable
Our service & maintenance programm are applicable

