

## Instruction Manual for Transport System

*LioGuard®***S-Box X1****M-Box X1****XXL-Box****S-Box X2****M-Box X2****LP1-Box**

Read these instruction carefully before using the system,  
and retain for future reference.

## Contents

|       |                                                              |    |
|-------|--------------------------------------------------------------|----|
| 1     | Product Description.....                                     | 3  |
| 1.1   | Technical data.....                                          | 3  |
| 1.2   | Components .....                                             | 5  |
| 2     | Safety instructions.....                                     | 6  |
| 2.1   | Intended use .....                                           | 6  |
| 2.2   | Information about PyroBubbles® .....                         | 6  |
| 3     | Application .....                                            | 6  |
| 3.1   | Storage.....                                                 | 6  |
| 3.1.1 | Safety instructions .....                                    | 6  |
| 3.1.2 | Storage instructions .....                                   | 7  |
| 3.2   | Transport .....                                              | 7  |
| 3.2.1 | Safety instructions .....                                    | 7  |
| 3.2.2 | Transport instructions.....                                  | 7  |
| 3.3   | Opening the transport container.....                         | 8  |
| 3.3.1 | Work procedure.....                                          | 8  |
| 3.4   | Packaging the hazardous material.....                        | 10 |
| 3.4.1 | Safety instructions .....                                    | 10 |
| 3.4.2 | Packing instructions .....                                   | 10 |
| 3.4.3 | Work procedure.....                                          | 10 |
| 3.5   | Sealing the transport container.....                         | 11 |
| 3.5.1 | Changing the clamping stroke of the the toggle catches ..... | 11 |
| 3.5.2 | Work procedure.....                                          | 12 |
| 3.6   | Removing the hazardous material.....                         | 14 |
| 3.6.1 | Safety instructions .....                                    | 14 |
| 3.6.2 | Work procedure.....                                          | 15 |
| 4     | Maintenance and Repair .....                                 | 15 |
| 4.1   | Maintenance.....                                             | 15 |
| 4.1.1 | Safety instructions .....                                    | 15 |
| 4.1.2 | Maintenance instructions .....                               | 15 |
| 4.2   | Repairs .....                                                | 16 |
| 5     | Troubleshooting .....                                        | 16 |
| 6     | Waste Disposal/Environmental Protection.....                 | 16 |
| 7     | Contact Information .....                                    | 16 |

## 1 Product Description

### 1.1 Technical data

|                                               |                                         | S-Box<br>X1                            | S-Box<br>X2         | M-Box<br>X1         | M-Box<br>X2          | XXL-Box                | LP1-Box                             |
|-----------------------------------------------|-----------------------------------------|----------------------------------------|---------------------|---------------------|----------------------|------------------------|-------------------------------------|
| Nominal outer dimensions in mm<br>(L x W x H) |                                         | 800 x 600<br>x 750                     | 800 x 600<br>x 1100 | 1200 x 800<br>x 800 | 1200 x 800<br>x 1250 | 2550 x 1550<br>x 1100  | 2840 x 1240<br>x 960                |
| Nominal inner dimensions in mm<br>(L x W x H) |                                         | 670 x 470<br>x 570                     | 670 x 470<br>x 960  | 1070 x 670<br>x 640 | 1070 x 670<br>x 1100 | 2370 x 1360<br>x 840   | 2160-2700<br>x 1460-<br>2000 x 570  |
| Maximum gross weight in kg                    |                                         | 185                                    | 240                 | 350                 | 700                  | 1530                   | 2024                                |
| Container material                            |                                         | Stainless steel or Galvanized steel    |                     |                     |                      |                        | Galva-<br>nized<br>steel            |
| Gasket material                               |                                         | Ethylene-Propylene-Diene-rubber (EPDM) |                     |                     |                      |                        | Chloro-<br>prene-<br>rubber<br>(CR) |
| Safety<br>valves                              | Quantity                                | 2                                      |                     |                     |                      | 4                      | 5                                   |
|                                               | Bolted joint diameter<br>in mm (inches) | 25,4 (1'')                             |                     |                     |                      | 50,8 (2'')             | 63,5<br>(2,5'')                     |
|                                               | Opening pressure in<br>kPa              | 21 (0,21 bar, 3 psi)                   |                     |                     |                      | 7 (0,07 bar,<br>1 psi) |                                     |
| Filler material                               |                                         | PyroBubbles®-bulk                      |                     |                     |                      |                        |                                     |



S-Box X1



M-Box X1




S-Box X2



M-Box X2



XXL-Box

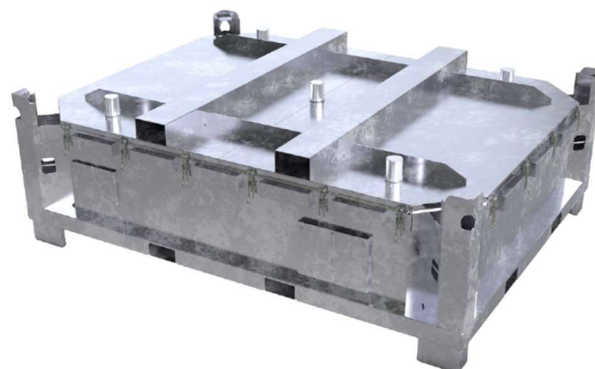

LP1-Box

## 1.2 Components

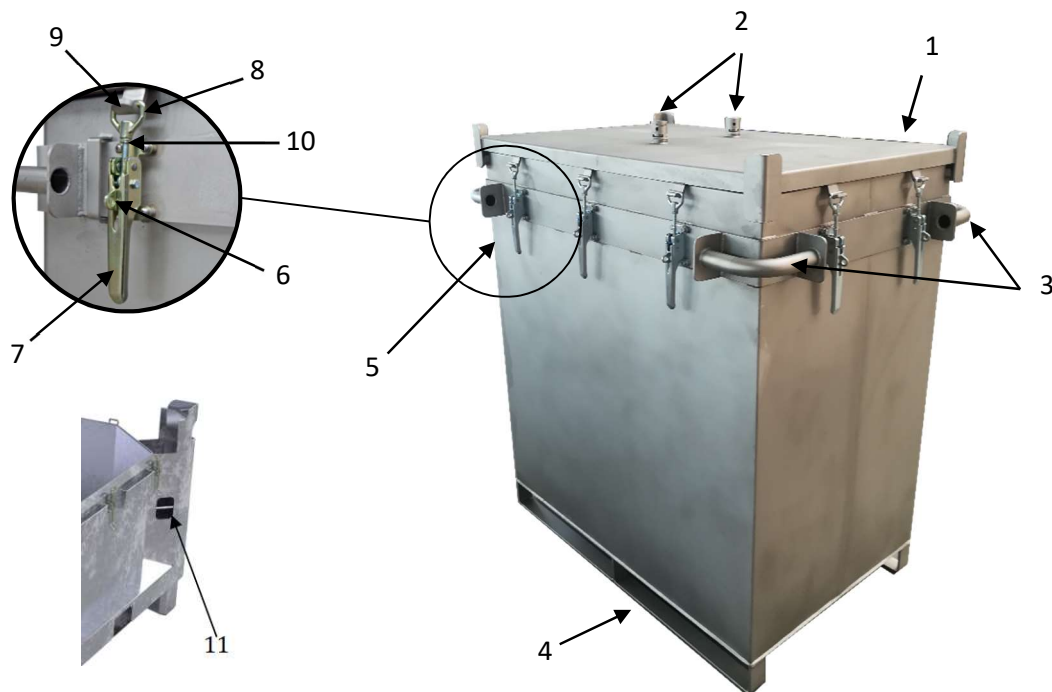


fig. 1: example illustration

- |   |                      |    |                |    |                       |
|---|----------------------|----|----------------|----|-----------------------|
| 1 | cover                | 6  | locking latch  | 11 | anchor point (only at |
| 2 | safety valve         | 7  | locking lever  |    | XXL-Box)              |
| 3 | collision guard      | 8  | locking eyelet |    |                       |
| 4 | guide (only at LP1-  | 9  | locking hook   |    |                       |
|   | Box also on the lid) | 10 | locknut        |    |                       |
| 5 | toggle catch         |    |                |    |                       |

## 2 Safety instructions

### 2.1 Intended use

The transport container is used for transporting lithium-ion and lithium-metal cells and batteries. The transport container shall be used only in an undamaged and unmodified condition. The integrity of the transport container shall be checked before each use.

### 2.2 Information about PyroBubbles®

PyroBubbles® are multi-cellular hollow glass spheres, which are not dangerous (dust is not respirable) in their solid form (delivery condition). If PyroBubbles® are ground or pulverized mechanically, continuous contact with high concentrations of respirable dust can impair lung functioning. The general dust limits of 1.25 mg/m<sup>3</sup> for respirable (A dust) and 10 mg/m<sup>3</sup> for inhalable (I dust) fractions must be observed. An individual time-weighted average must not exceed the value of 3 mg/m<sup>3</sup> for the A-dust fraction. For details, refer to TRGS 900 (or respective nationally applicable technical rules for hazardous substances). If the dust concentration at the place of work exceeds the specified occupational exposure limit values, approved and suitable respiratory protection must be used (filter type P2).

It is recommended to wear eye protection in the case of dust formation, and to wear gloves in the case of skin contact.

PyroBubbles® that no longer correspond to their condition at the time of delivery, must be disposed of in accordance with the disposal instructions (see section 6) and shall not be used further, because they no longer meet the requirements with respect to sorption capacity and thermal insulation.

## 3 Application

### Attention

Before each use, check the integrity of the container and the other components such as the rubber seal, the toggle catches and the safety valves.

### 3.1 Storage

#### 3.1.1 Safety instructions



#### **Warning**

Risk of injury from falling parts

#### **Injuries ranging from severe to fatal**

When moving transport containers, use only suitable lifting gear attached to the designated lifting points. No person must be allowed to linger within the working area of the lifting gear.

### 3.1.2 Storage instructions

PyroBubbles® must be stored in a dry location.

The transport container should be stored at temperatures between +5°C and +25°C, protected from direct solar radiation and in a dry area, to maintain the sealing properties of the rubber seal in accordance with DIN 7716 standard (Rubber products: Requirements for storage, cleaning and maintenance).

## 3.2 Transport

### 3.2.1 Safety instructions



#### **Danger**

Danger of poisoning due to toxic, partially odourless gases

#### **Injuries ranging from severe to fatal**

In the event that the cell or battery suffers a thermal runaway, leave the danger zone as quickly as possible.



#### **Danger**

Risk of explosion due to explosive gases

#### **Injuries ranging from severe to fatal**

In the event that the cell or battery suffers a thermal runaway, avoid ignition sources. If possible, provide sufficient ventilation.



#### **Warning**

Risk of injury from falling parts

#### **Injuries ranging from severe to fatal**

When moving transport containers, use only suitable lifting gear attached to the designated lifting points. No person must be allowed to linger within the working area of the of the lifting gear.

### 3.2.2 Transport instructions

During transport, observe the relevant legal regulations. This also applies to any additional markings or labels.

Make sure that all the locking eyelets of the toggle catches are properly hooked onto the locking hooks, and that all toggle catches are closed.

Lift the transport container only by means of the guides provided, and use only appropriate lifting gear.

When transporting dangerous goods, the space above the container must be kept free, so that in the event of a thermal runaway the reaction gases have adequate space to vent via the safety valves.

To increase static friction, non-slip mats must be placed beneath the feet of the transport container. The load is secured by lashing it down with tensioning straps, which are strapped across the cover.

### 3.3 Opening the transport container

#### 3.3.1 Work procedure



1. The transport container is delivered in a closed condition, locked by means of the toggle catches.



#### Caution

There is a risk of squeezing or jamming fingers/hands in the toggle catches

#### Slight injuries to fingers and hands

Wear work gloves Do not insert your fingers or hands between the locking bolt and the locking lever.



2. Press the locking bolt of the toggle catch downwards, and at the same time move the locking lever upwards.



3. Remove the locking eyelet from the locking hook.



4. Push the locking lever back downwards until the locking bolt engages by itself.



5. Repeat steps 2 through 4 for all toggle catches.



6. Attach the lifting gear to all 4 anchor points on the cover. (only at XXL box)  
Use the guides on the cover. (only at LP1-Box)



7. Lift the cover off.



### Caution

Risk of injury from falling parts

### Injuries ranging from severe to fatal

When moving the cover, use only suitable lifting gear attached to the designated lifting points. No person must be allowed to linger within the working area of the of the lifting gear.

### 3.4 Packaging the hazardous material

#### 3.4.1 Safety instructions



##### **Warning**

Risk of poisoning due to toxic substances leaking from the battery

**Injuries ranging from severe to fatal**

Use protective equipment suitable for the hazardous material involved.



##### **Warning**

Hazards due to electric voltage

**Injuries ranging from severe to fatal**

Cover the terminals of the battery with electrically insulating materials. Wear adequately electrically insulating protective equipment.

##### **Attention**

Respiratory protection (filter type P2) is recommended, to prevent damage to the respiratory organs by the dust that may be formed.

#### 3.4.2 Packing instructions

The distances between the battery and the walls of the container depends on the respective battery (design, energy content, condition, etc.).


#### 3.4.3 Work procedure



1. Open the transport container (see section 3.3.1).



2. Fill a minimum layer of 20 cm (or distance according to transport specifications) of PyroBubbles® into the transport container. Compact the PyroBubbles® fill by tapping lightly on all four side walls of the container with a rubber mallet.



3. Place the hazardous material into the container in such a way that the minimum distance is ensured.

Minimum distance S-Box X1 – M-Box X2: 12cm to all sides of the container walls and 20 cm to the container bottom and cover (or distance according to the transport permit)

XXL-Box & LP1-Box: 20cm all around (or distance according to the transport permit)



4. Fill PyroBubbles® into the transport container, up to the top edge. Pay particular attention to ensure that the transport container is completely filled up to the top edge and in the corners. Compact the PyroBubbles® fill by tapping lightly on all four side walls of the container with a rubber mallet.

### Attention

Only when the transport container is completely filled with PyroBubbles® is an adequate level of protection ensured.



5. Close the transport container (see section 3.5.2).

## 3.5 Closing the transport container

### 3.5.1 Changing the clamping stroke of the the toggle catches



1. Loosen the locknut.



2. Turn the locking eyelet counterclockwise to reduce the clamping stroke. Turn the locking eyelet clockwise to increase the clamping stroke.



3. Now tighten the locknut.

### 3.5.2 Work procedure



1. Throw the locking eyelets in such a way, that they form a right angle with the container wall.



#### Caution

Danger of pinching between cover and transport container

**Slight injuries to fingers and hands**

Wear work gloves Do not insert your fingers or hands between the cover and the transport container.



2. Attach the lifting gear to all 4 anchor points on the cover. (only at XXL box)

Use the guides on the cover. (only at LP1-Box)





3. Place the cover centrally on the transport container.



### Caution

There is a risk of squeezing or jamming fingers/hands in the toggle catches

### Slight injuries to fingers and hands

Wear work gloves Do not insert your fingers or hands between the locking bolt and the locking lever.



4. Press the locking bolt of a toggle catch downwards, and at the same time move the locking lever upwards.




5. Place the locking eyelet over the locking hook.



6. In the unclamped condition, the locking lever should be at an angle of approximately 45° to the container wall. It may be necessary to alter the clamping stroke of the toggle catch (see section 3.5.1).



7. Repeat steps 3 through 5 for all toggle catches.



8. Push the locking levers of all toggle catches downwards until the locking bolt engages by itself.

## 3.6 Removing the hazardous material

### 3.6.1 Safety instructions

If the transport container shows any signs of deposits, discoloration or a piercing smell, you must assume that the electrolyte has leaked or there has been a thermal runaway in the battery.



#### **Danger**

Danger of poisoning due to toxic, partially odourless gases and toxic substances

#### **Injuries ranging from severe to fatal**

In the event of electrolyte leaking from the cell or battery, or a thermal runaway, the transport container must be opened only by personnel wearing protective equipment appropriate to the type of hazardous substance involved.



#### **Danger**

Danger of poisoning by inhalation of contaminated dust

#### **Injuries ranging from severe to fatal**

In the event of electrolyte leaking from the cell or battery, or a thermal runaway, the transport container must be opened only by personnel wearing protective equipment appropriate to the type of hazardous substance involved.



#### **Warning**

Risk of explosion due to explosive gases

#### **Injuries ranging from severe to fatal**

In the event that the cell or battery suffers a thermal runaway, avoid ignition sources. If possible, provide sufficient ventilation.

**Warning**

Hazards due to electric voltage

**Injuries ranging from severe to fatal**

Cover the terminals of the battery with electrically insulating materials. Wear adequately electrically insulating protective equipment.

**3.6.2 Work procedure***Variant 1*

1. Open the transport container (see section 3.3.1).
2. Remove the PyroBubbles® by skimming or vacuuming them off until the battery is visible.
3. Remove the batteries.

*Variant 2*

1. Open the transport container (see section 3.3.1).
2. Use a forklift truck equipped with a fork rotator to lift the container between its guides and hold it over a grating.
3. Slowly rotate the transport container until the battery slides up against the walls of the container.

**Attention**

If the container is rotated too quickly, the battery could slam against the wall of the container and damage it severely.

4. Continue rotating the transport container to a total of 180°. The battery will fall out on to the top of the grating, while the PyroBubbles® will fall through the grating.

**Attention**

The mechanical stress to which the battery is subjected in this way could cause a thermal runaway.

**4 Maintenance and Repair****4.1 Maintenance****4.1.1 Safety instructions****Warning**

Risk of poisoning due to toxic substances that have leaked from the battery

**Injuries ranging from severe to fatal**

In the event of contamination due to substances leaking from the battery, wear protective equipment appropriate to the hazardous substances involved.

**4.1.2 Maintenance instructions**

Contamination by substances leaking from the battery on to the transport containers must be removed. For this purpose, use only cleaning materials that do not attack the material of the

transport container (stainless steel) or the sealing rubber (EPDM).

PyroBubbles® can generally be reused, provided that they show no visual changes and the granules are odor-neutral.

The service life of the sealing rubber is approximately 8 years.

## 4.2 Repairs

Do not use damaged transport containers; they no longer meet the requirements of the approved type. Repairs shall be made exclusively by the manufacturer or by a specialist authorized by the manufacturer.

## 5 Troubleshooting

**Even though the cover is mounted centrally, the locking eyelets cannot be engaged on the locking hooks.**

Rotate the cover horizontally by 180°. If the locking eyelets still cannot be engaged on the locking hooks, it may be that the locking hooks are damaged.

## 6 Waste Disposal/Environmental Protection

The materials used in manufacturing the transport container are recyclable and can be recycled through commonly available recycling programs.

Uncontaminated PyroBubbles® can be forwarded to commonly available recycling programs.



### **Danger**

Danger of poisoning by inhalation of contaminated dust

**Injuries ranging from severe to fatal**

Use protective equipment suitable for the type of contamination involved.

Contaminated PyroBubbles® must be properly disposed of in accordance with the applicable national regulations and in accordance with their respective contamination.

## 7 Contact Information

Genius Technologie GmbH  
Am Theresenhof 2  
15834 Rangsdorf  
GERMANY  
[www.genius-group.de](http://www.genius-group.de)